



IQ 532[®] Laser



iridex.com

IQ 532[®] Laser

Green 532 nm Laser with MicroPulse[®] Technology*



The Advantages of Innovation

- High power with 2500 mW of deliverable laser power
- High speed with pulse durations from 10 to 3000 ms
- DualSense™ provides simple selection of multiple RFID- and SMA-compatible delivery devices
- Intuitive touch screen interface with high contrast color display
- Voice confirmation to aid surgical techniques



Ergonomic and Easy to Use

- Dual port for simultaneous connectivity of laser delivery devices
- Convenient 3-knob control console simplifies programmable adjustments
- 10 programmable user presets



Optional Accessories

• Full-Featured Remote Control

- Compact design for easy placement or use in sterile field
- View displays and adjust parameters from 2 vantage points for increased convenience and efficiency

• Wireless Footswitch


- No cord, no clutter, no limitations
- Available with power-adjust to control laser actuation and power settings

* MicroPulse is an optional module available at time of purchase only.

What is MicroPulse Technology?


CW-Pulse (Continuous-Wave) Mode

CW lasers deliver a steady stream of laser energy. Even with the shortest exposure duration, a rapid rise in thermal elevation occurs with consequent coagulation.

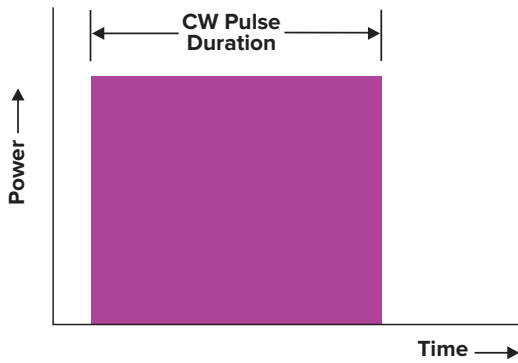

MicroPulse Mode*

MicroPulse technology finely controls thermal elevation by "chopping" a continuous-wave (CW) beam into an envelope of repetitive short pulses allowing tissue to cool between pulses and reduce thermal buildup.

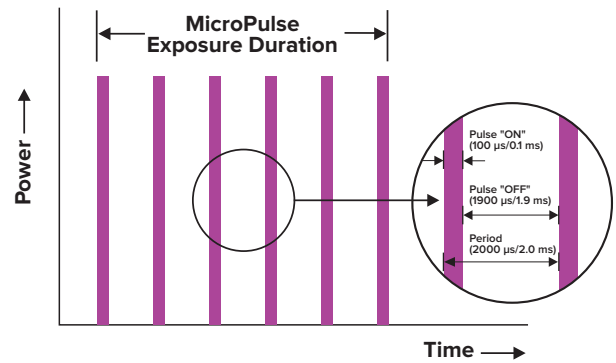


Standard Photocoagulation & MicroPulse® Therapy in One Laser

MicroPulse Application


- Fovea-Friendly MicroPulse Laser for retinal disorders¹



- Repeatable MicroPulse Laser Trabeculoplasty (MLT) for glaucoma therapy




VA 20/50 | CRT 434 μm



3 Mos Post-Op | VA 20/30 | CRT 314 μm



Trabecular meshwork after ALT



Trabecular meshwork after MLT

1. Bhagat N, Zarbin M, Mansour S, Chong V, and Cardillo JA. Fovea-friendly MicroPulse Laser. Supplement to Retina Today May/June 2012

* MicroPulse is an optional Module.

Versatility to Treat Retina & Glaucoma



When I opened my practice, I purchased the IQ 532. Besides my slit lamp, it's been the most useful piece of equipment for my patients and my business. Its technical advantage of delivering both standard and MicroPulse laser therapy protocols gives me multiple options to treat both glaucoma and retinal disorders.

David Dickman, MD

Universal Eye Center, Rolesville, NC

Safe Alternative to Treat Glaucoma



The IQ 532, with MicroPulse, has given me a great new option for glaucoma treatment. MicroPulse Laser Trabeculoplasty [MLT] has been easy to adopt, and allows me to provide a quiet, safe and very well-tolerated approach to reduce IOP or to reduce the need for IOP-lowering medications. The success that I have experienced using MLT brings comfort to my patients and to me in knowing that there will be no observable damage from the therapy.

Nathan Radcliffe, MD

New York Eye Surgery Center, New York, NY

MLT vs. SLT

	MicroPulse Laser Trabeculoplasty (MLT)	Selective Laser Trabeculoplasty (SLT)
Wavelength	532 nm and 577 nm	532 nm
Mechanism	Thermally affects - not destroys - pigmented trabecular meshwork cells without thermal or collateral damage	Selective destruction of pigmented trabecular meshwork cells without thermal or collateral damage
Learning Curve	Easy	Easy
Repeatable	Yes	Yes
Visible signs of treatment intra-or post-operative	No	Yes
Inflammation	No	Yes
Spot Size	300 μm (smaller spot to access narrow angles)	400 μm
Complications	Minimal to none	Post-op IOP spikes are possible
Functionality of laser system	Continuous-wave and MicroPulse treatment for glaucoma and retinal disorders	SLT
Parameter Control	Power, ON/OFF time, number and rep rate of pulses	Pulse energy

Ahmed I, Gossage D, Vold S. With Years of SLT Data, Why Consider MicroPulse? Webinar, June 2013.



Specifications


IQ 532® Laser System	
Wavelength	532 nm Green
Weight	9.0 kg (19.2 lb)
Dimensions	30.5 cm x 35.6 cm x 21.4 cm (12 in W x 14 in D x 8.5 H)
Connector Type	RFID Resistor
Electrical	100-240 VAC, 50.60 Hz
Cooling	Air/TEC cooled
Exposure Duration	CW-Pulse: 10 ms – 3000 ms or CW to 60 seconds
Exposure Interval	CW-Pulse: 10 ms – 3000 ms or single pulse
MicroPulse Duration	MicroPulse: 0.05 – 1.00 ms
MicroPulse Interval	MicroPulse: 1.00 – 10.00 ms
Aiming Laser	Diode laser, 635 nm nominal
Delivery Device Power Output	TxCell 0 – 2000 mW SLA: 0–2000 mW LIO: 0–2000 mW EndoProbe: 0–2000 mW OtoProbe: 0–2500 mW FlexFiber Probe: 0 - 2500 mW



CE 2797

EC REP

Emergo Europe
Prinsessegracht 20,
2514 AP The Hague, The Netherlands



Contact Iridex today to learn more

+1.650.962.8100 · customerservice@iridex.com · iridex.com



© 2022 Iridex. All rights reserved. Iridex, the Iridex logo, TxCell, IQ 532, IQ 577, EndoProbe, MicroPulse, and the MicroPulse logo are registered trademarks of Iridex.
88285 Rev. A 03.2022